


Solenoid valve(5/2 , 5/3 way)



4V300 Series





Symbol

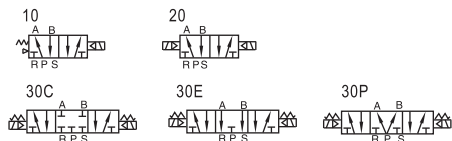

Product feature

- 1. Pilot-oriented mode: optional for internal or external.
- 2. Structure in sliding column mode: good tightness and sensitive reaction.
- 3. Three position solenoid valves have three kinds of central function for your choice.
- 4. Double control solenoid valves have memory function.
- 5. Internal hole adopts special processing technology which has little attrition friction, low start pressure and long service life.
- 6. No need to add oil for lubrication.
- 7. It is available to form integrated valve group with the base to save installation space.
- 8. Affiliated manual devices are equipped to facilitate installation and debugging.
- 9. Several standard voltage grades are optional.

Flow chart

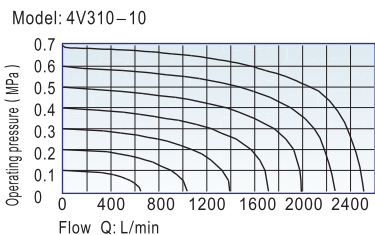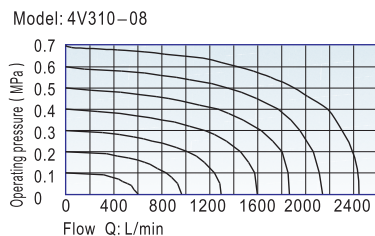

Specification

Model	4V310-08 4V320-08	4V330C-08 4V330E-08 4V330P-08	4V310-10 4V320-10	4V330C-10 4V330E-10 4V330P-10
Fluid	Air(to be filtered by 40 μ m filter element)			
Acting	Pilotd			
Port size ①	In=Out=Exhaust=1/4"		In=Out=3/8" Exhaust=1/4"	
Orifice size	25.0mm ² (Cv=1.40)	18.0mm ² (Cv=1.00)	30.0mm ² (Cv=1.68)	18.0mm ² (Cv=1.00)
Valve type	5 port 3 position	5 port 2 position	5 port 3 position	5 port 2 position
Operating pressure	0.15~0.8MPa(21~114psi)			
Proof pressure	1.5MPa(215psi)			
Temperature °C	-20~70			
Material of body	Aluminum alloy			
Lubrication ②	Not required			
Max. frequency ③	4 cycle/sec	3 cycle/sec	4 cycle/sec	3 cycle/sec
Weight	4V310-08:310g 4V320-08:400g	450g	4V310-10:310g 4V320-10:400g	450g

- ① PT thread, NPT thread and G thread are available.
- ② Once lubricated air is used, continue with same medium to optimise valve life span. Lubricants like ISO VG32 or equivalent are recommended.
- ③ The maximum actuation frequency is in the no-load state.

Coil specification

Item	Specitification
Standard voltage	AC220V, AC110V, AC24V, DC24V, DC12V
Scope of voltage	AC: ± 15% DC: ± 10%
Power consumption	AC:3.5VA DC:3.0W
Protection	IP65(DIN40050)
Temperature classification	B Class
Electrical entry	Terminal, Grommet
Activating time	0.05 sec and below

Ordering code

4V 3 10 10 A □ P

Model

4V: Solenoid valve(5/2, 5/3 way)

Code

3: 300 Series

Valve type

10: Single solenoid 5/2 way
20: Double solenoid 5/2 way
30C: Double solenoid 5/3 way closed center
30E: Double solenoid 5/3 way exhaust center
30P: Double solenoid 5/3 way pressure center

Thread type

P: PT
T: NPT
G: G

Electrical entry

Blank: Terminal
I: Grommet

Voltage

A: AC220V
B: DC24V
C: AC110V
E: AC24V
F: DC12V

Port size

08: 1/4"
10: 3/8"


Please refer to 37 for manifold specification and the order way.

Solenoid valve(5/2 , 5/3 way)


4V300 Series

AIRTAC


Inner structure



4V310

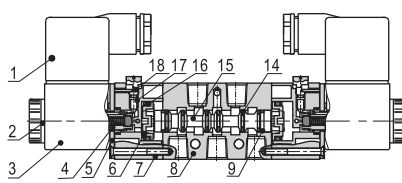


4V320

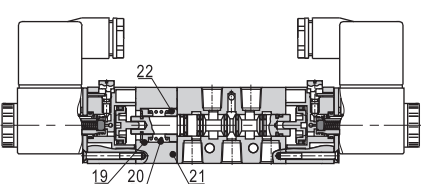

4V330C


No.	Item	No.	Item	N0.	Item
1	Connector	9	Wear ring	17	Override spring
2	Coil net	10	Bottom cover	18	Manual override
3	Coil	11	Fixed screw	19	Spring holder
4	Armature	12	Spool spring	20	Return spring
5	Fixed plate	13	Bottom cover gasket	21	Side cover
6	Piston	14	Spool O-ring	22	Spring holder
7	Pilot kit	15	Spool		
8	Body	16	Piston O-ring		

Dimensions




4V310(Terminal)

Model\Item	A	B	C	D	E
4V310-08	1/4"	1/4"	22	29	0
4V310-10	1/4"	3/8"	24	28	4

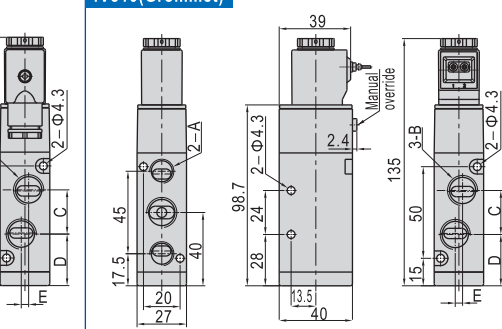


4V310(Grommet)

Model\Item	A	B	C	D	E
4V310-08	1/4"	1/4"	22	29	0
4V310-10	1/4"	3/8"	24	28	4

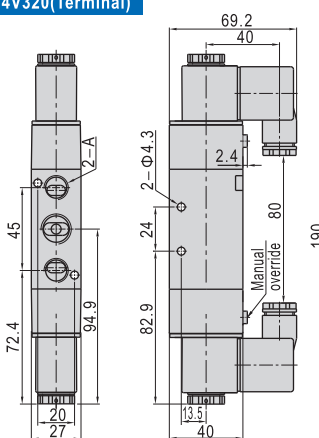


4V320(Terminal)

Model\Item	A	B	C	D	E
4V320-08	1/4"	1/4"	22	83.9	0
4V320-10	1/4"	3/8"	24	82.9	4

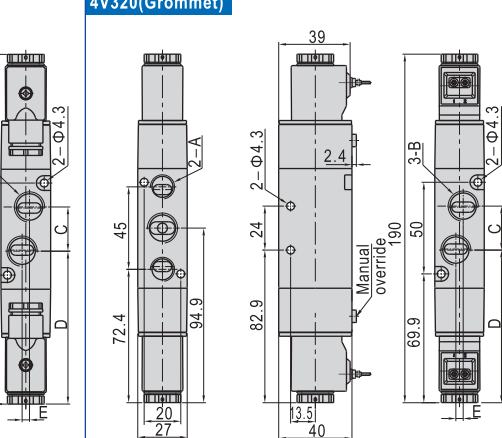


4V320(Grommet)

Model\Item	A	B	C	D	E
4V320-08	1/4"	1/4"	22	83.9	0
4V320-10	1/4"	3/8"	24	82.9	4

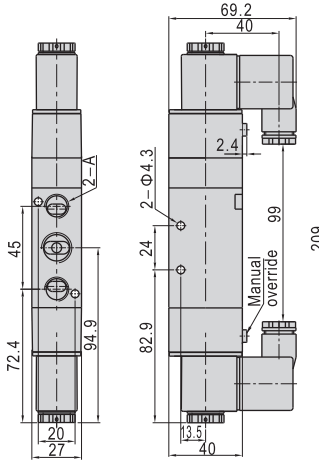

4V330(Terminal)

Model\Item	A	B	C	D	E
4V330-08	1/4"	1/4"	22	83.9	0
4V330-10	1/4"	3/8"	24	82.9	4

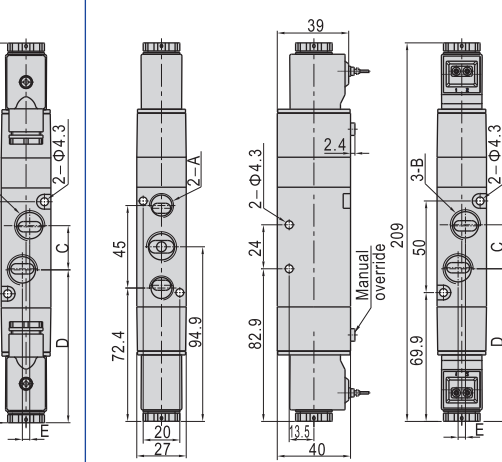

4V330(Grommet)

Model\Item	A	B	C	D	E
4V330-08	1/4"	1/4"	22	83.9	0
4V330-10	1/4"	3/8"	24	82.9	4

