

# Integrated solenoid valve's cable

F-DSUB25/F-DSUB37



## Cable ordering code

F - DSUB 25 F 200

① ② ③ ④

| ① Model         | DSUB: D-SUB Cable |                            |         |
|-----------------|-------------------|----------------------------|---------|
| ② Pin Number    | 25: 25PIN         | 37: 37PIN                  |         |
| ③ Terminal type | F: Two Females    | M: One Female+another male |         |
| ④ Wire length   | 200: 2m           | 300: 3m                    | 500: 5m |

## Specification




1. Flame resistand grade: UL94 VW-1.
2. Rated temperature: 80℃.
3. Rated voltage: 300V.

## How to select cable

| Cable type\Valve type | CPV10S | CPV15S | 7S(Single solenoid) | 7S(Double solenoid) |
|-----------------------|--------|--------|---------------------|---------------------|
| F-DSUB25              | ●      | ●      | ●                   |                     |
| F-DSUB37              |        |        |                     | ●                   |




## Dimensions and wire's assignment

### F-DSUB25

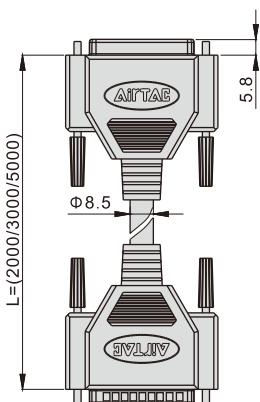

| Wire's assignment |                  |
|-------------------|------------------|
| PIN               | Color            |
| 1                 | Red+Black        |
| 2                 | Gray+Black       |
| 3                 | Brown+Black      |
| 4                 | Orange+Black     |
| 5                 | Yellow+Black     |
| 6                 | Green+Black      |
| 7                 | Blue+Black       |
| 8                 | White+Black      |
| 9                 | Violet+Red       |
| 10                | Silt green+Black |
| 11                | Pink blue+Black  |
| 12                | Pink+Black       |
| 13                | Black            |
| 14                | Red              |
| 15                | Gray             |
| 16                | Brown            |
| 17                | Orange           |
| 18                | Yellow           |
| 19                | Green            |
| 20                | Blue             |
| 21                | White            |
| 22                | Violet           |
| 23                | Silt green       |
| 24                | Pink blue        |
| 25                | Pink             |

### F-DSUB37

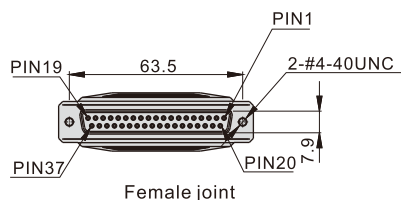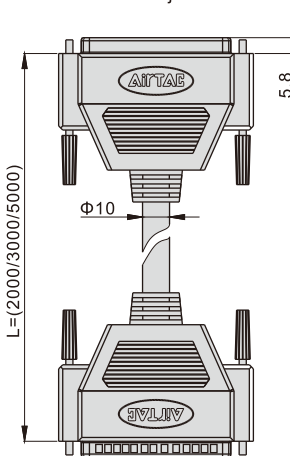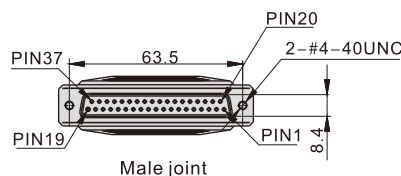

| Wire's assignment |                  |
|-------------------|------------------|
| PIN               | Color            |
| 1                 | Red+Black        |
| 2                 | Gray+Black       |
| 3                 | Brown+Black      |
| 4                 | Orange+Black     |
| 5                 | Yellow+Black     |
| 6                 | Green+Black      |
| 7                 | Blue+Black       |
| 8                 | White+Black      |
| 9                 | Violet+Red       |
| 10                | Silt green+Black |
| 11                | Pink blue+Black  |
| 12                | Pink+Black       |
| 13                | Red              |
| 14                | Gray             |
| 15                | Brown            |
| 16                | Orange           |
| 17                | Yellow           |
| 18                | Green            |
| 19                | Black            |
| 20                | Blue             |
| 21                | White            |
| 22                | Violet           |
| 23                | Silt green       |
| 24                | Pink blue        |
| 25                | Pink             |
| 26                | Red+White        |
| 27                | Gray+White       |
| 28                | Brown+White      |
| 29                | Orange+White     |
| 30                | Yellow+White     |
| 31                | Green+White      |
| 32                | Blue+White       |
| 33                | Violet+White     |
| 34                | Silt green+White |
| 35                | Pink blue+White  |
| 36                | Pink+White       |
| 37                | Red+Green        |